



2RREu35 225x63R (115V) B12-A3 p

DATA SHEET

release. d - Revision 11-2015

Voltage	Frequency	Input Power	Input Current	Capacitor	Airflow	Rotation speed	Acoustic level	Direction rotation	Admissible Temperature
V	Hz	W	A	μF	m³/h	RPM	dBA		Min/Max
115	50	156	1,36	18,0	1215	2560	67	R	-40°C / +50°C
115	60	212	1,86	18,0	1285	2695	68	R	-40°C / +50°C
115	50	715 CFM							-40°F / 122°F
115	60	756 CFM							-40°F / 122°F





dBA : free blowing

ErP 2013

NOK


ErP 2015

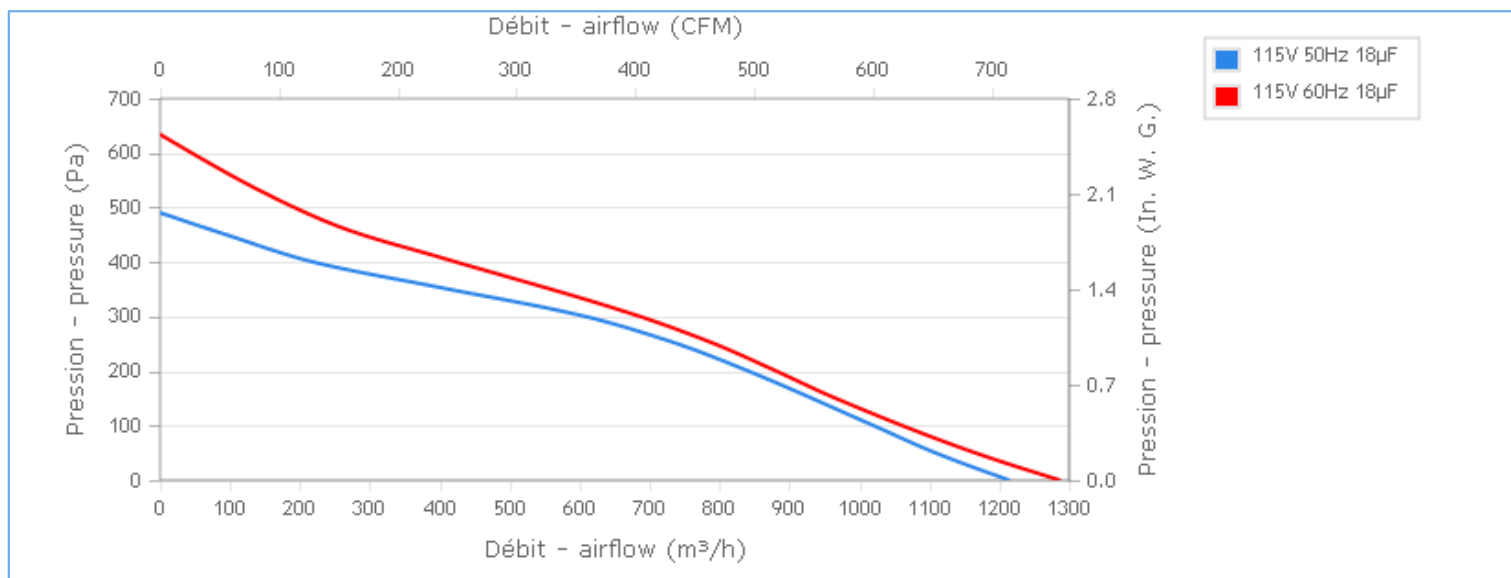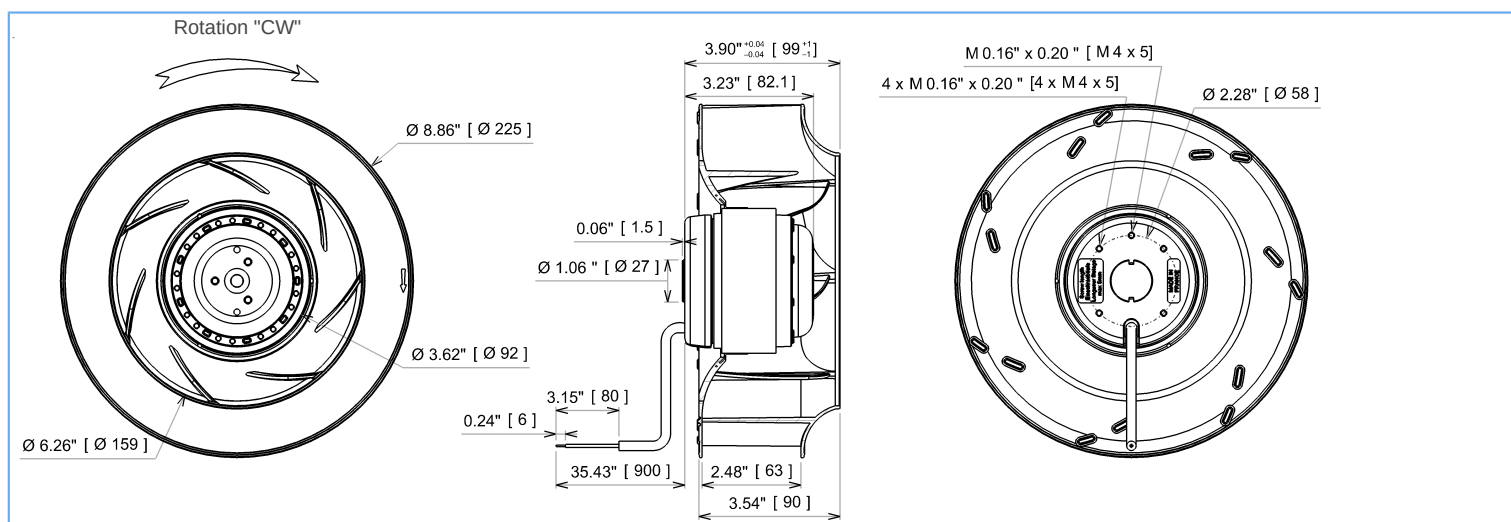NOK

Description

- .Weight : 2,4 Kg
- .Ball bearing
- .Class F, thermally protected
- .IP44 protection depending on installation and position as per EN60034-5
- .G2.5 balancing
- .Rotor : black paint
- .PA 6/6 UL 94 V-0 plastic impeller
- .Motor - UL Recognized component

U1 = Blue
U2 = Black
Z = Brown
PE = Green/Yellow




2RREu35 225x63R (115V) B12-A3 p

DATA SHEET

release. d - Revision 11-2015

Data in accordance to ErP directive

Voltage	115	V
Frequency	50	Hz
Power	0,167	kW ⁽¹⁾
Airflow	736	m ³ /h ⁽¹⁾
Pressure	252	Pa ⁽¹⁾
Rotation speed	2450	RPM ⁽¹⁾
(1) at optimal efficiency point		

For service use only in Europe according ErP directive EU 2009/125/EC

Accessories

19225

19225



Measurement setup

16214 Ouie Ø252 ext Ø155 int GALVA

Documents

Manuel d'utilisation
www.ecofit.com/site/normes

Operating and recycling manual
www.ecofit.com/anglais/normes

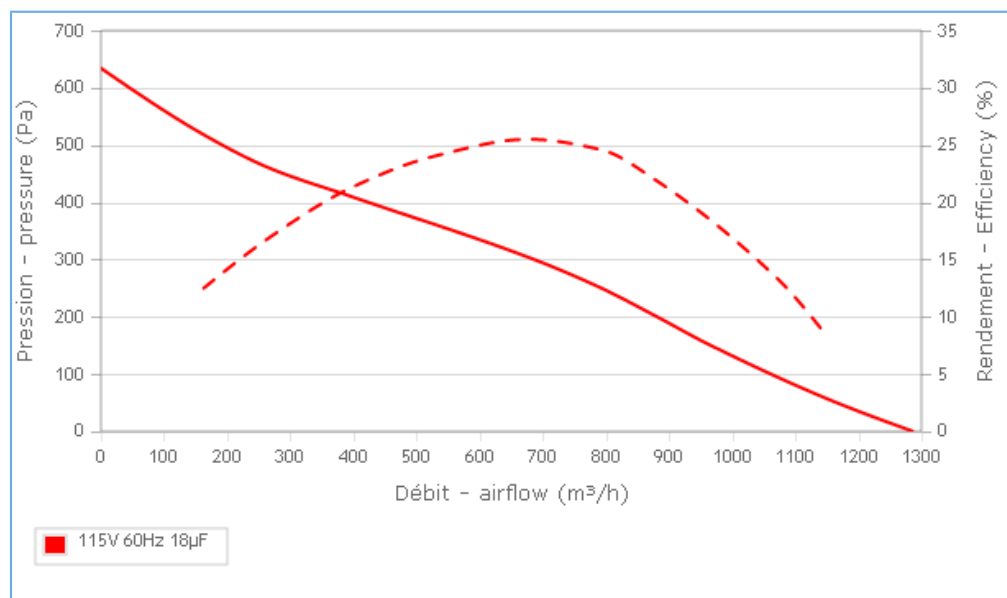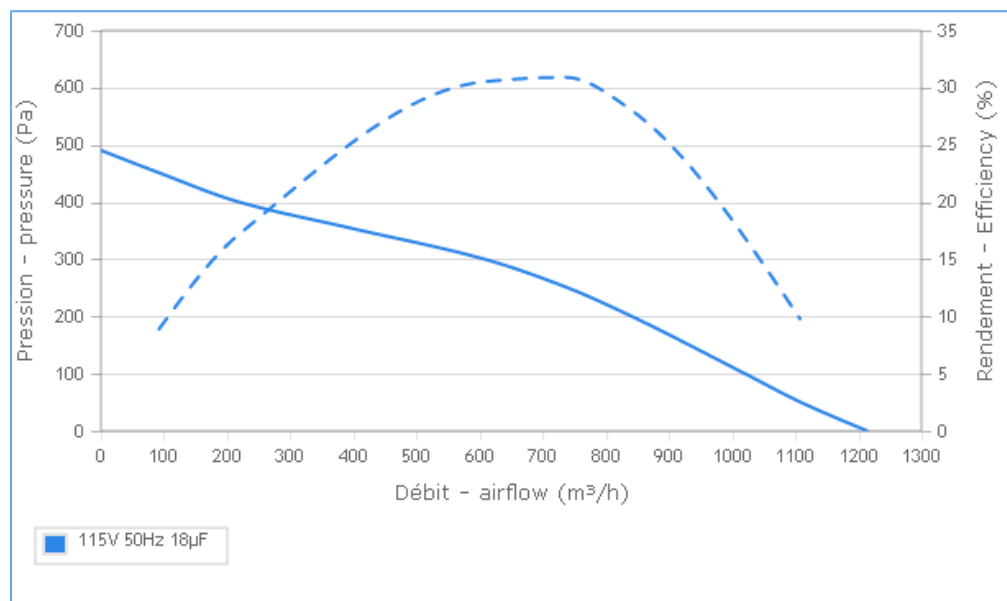

UL2111 (XEW2,8)
 N° file E135223
 2RS935