
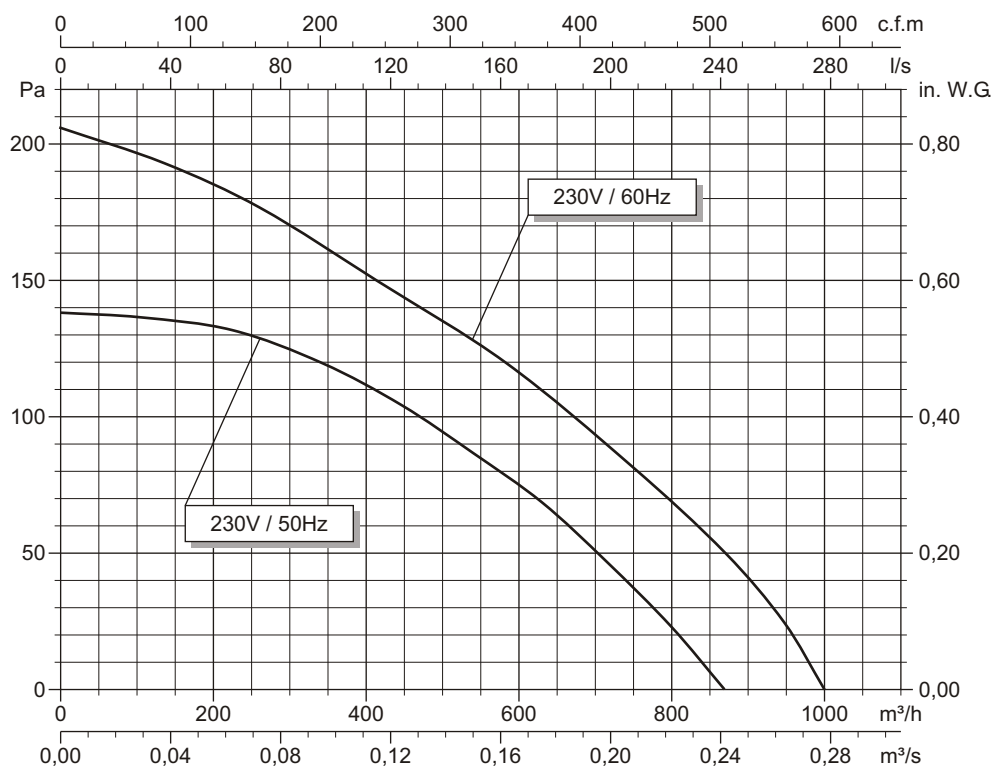


March 2002

Voltage	Frequency	Input power	Current	Capacitor	Air flow	Rotational speed	Sound level	Direction of rotation	Max. Air temp.
V	Hz	Wa	A	μF	m³/h	rpm	dBA		°C
230	50	47	0,21	1,5	870	1395	59	R	-20 / +70
230	60	55	0,25	1,5	1000	1660	63	R	-20 / +70

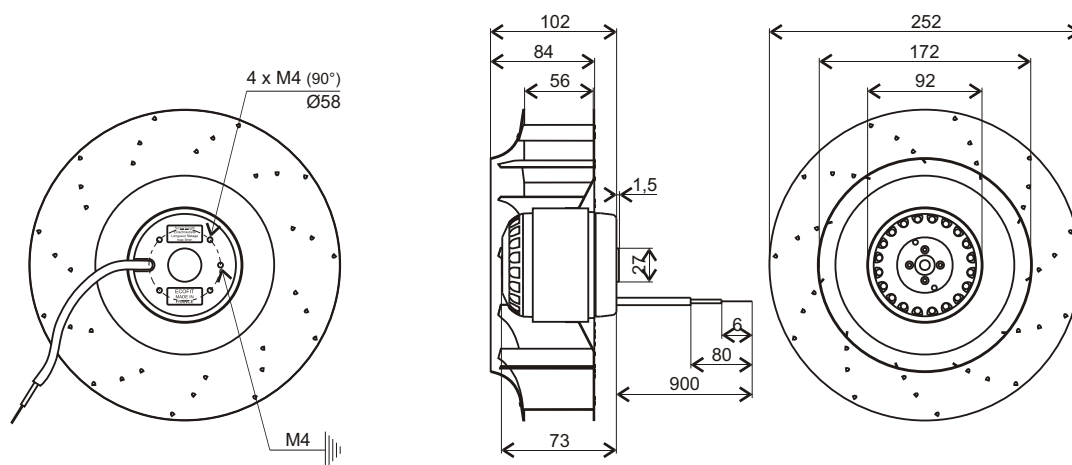

- Ball bearings.
- Cl.F windings protected by thermal cut-out.
- Protection IP 44.
- Balancing G2.5.
- Galvanised steel impeller.

Blue
Green/Yellow L
PE

Black
N C
Brown