

VA-748x

Electric Terminal Unit Actuator

Product Bulletin

The VA-748x Series provides Floating, Proportional or Proportional control with 0-10 V position feedback signal in HVAC applications.

The compact design of this actuator makes it suitable for installation in confined spaces, such as fan coil, chilled ceiling, manifolds, etc.

The VA-748x Series actuator is designed for field mounting onto Johnson Control and competitor's Terminal Unit Valves.

Due to the innovative concept of auto stroke detection, the VA-748x can be installed over most of the conventional terminal unit valve in the market and PICV with variable strokes.



- **Low and line voltage**
Flexible applications
- **Floating and proportional control**
Flexible application
- **Voltage and current analog input**
Suitable for any controller
- **Different analog input ranges**
Flexible applications
- **Different actuator speed**
New market opportunities
- **Double colour LED**
Provide information about status and diagnostic
- **Removable cable**
No expert requires for connection or replacement
- **Different cable length available as separate kit**
OEM's version easily available
- **Auto Stroke Detection**
Suitable for valve with variable stroke
- **Feedback Control**
2 mA max. at 0(2)...10 VDC

Ordering Codes

Product Codes	Control Type	Power Supply	Running Time	Nominal Force	Factory Stroke Config.	Cable Length	Mounting Thread nut	Special Config.	Feedback			
VA-7480-0011	Floating	24 Vac	13 sec/mm	120 N	---	1.5 m	M28x1.5	---	---			
VA-7480-0312						3m		UL Listed				
VA-7481-0011						1.5 m						
VA-7480-0001						1.5 m						
VA-7481-0001			8 sec/mm			2 m	M30x1,5	---				
VA-7480-0201-TA			140 N	---	5 m							
VA-7480-0501-TA					1.5 m							
VA-7480-4001					1.5 m							
VA-7480-4003		230 Vac	13 sec/mm	120 N	---	1.5 m	M28x1.5	---				
VA-7480-0013						1.5 m						
VA-7481-0013						1.5 m						
VA-7480-0003						1.5 m						
VA-7481-0003			8 sec/mm			1.5 m	M30x1,5	---				
VA-7481-4003						1.5 m						
VA-7482-1001	Proportional	24 Vac/Vdc	8 sec/mm	120 N	3.2 mm	1.5 m	M30x1,5	---	---			
VA-7482-2001					4.3 mm							
VA-7482-3001					6.0 mm							
VA-7482-1001-RA					3.2 mm	3 m	Reverse action	---				
VA-7482-1301-RA				120 N	4.3 mm	1.5 m						
VA-7482-2001-RA					---	3 m						
VA-7482-0011					4.3 mm	1.5 m	M28x1.5	---				
VA-7482-0311					---	3 m						
VA-7482-0312			140 N	4.3 mm	2 m	M30x1,5	Reverse action	---				
VA-7482-2201-TA					5 m							
VA-7482-2501-TA				120 N	2.5 mm							
VA-7482-5001					5 mm	1.5 m	---	---				
VA-7482-6001					5.5 mm							
VA-7482-7001					2 m halogen free							
VA-7482-8201			160 N	Auto stroke detection	1.5 m CMP	M30x1,5	Reverse action	---				
VA-7482-9201					2 m halogen free							
VA-7482-8201-RA					2 m halogen free							
VA-7482-9201-RA					2 m halogen free							
VA-7482-8002-RA					2 m halogen free							
VA-7482-9002-RA					2 m halogen free							
VA-7483-8201					2 m halogen free							
VA-7483-9201					2 m halogen free							
VA-7483-8201-RA					2 m halogen free							
VA-7483-9201-RA					2 m halogen free							

Accessories (order separately)

Accessories Codes	Description	Packing
VA-7480-CAB21	Floating 24 V – 2 meter length	Plastic Bag
VA-7480-CAB31	Floating 24 V – 3 meter length	
VA-7480-CAB51	Floating 24 V – 5 meter length	
VA-7480-CAB11	Floating 24 V – 10 meter length	
VA-7480-CAB33	Floating 230 V – 3 meter length	
VA-7480-CAB53	Floating 230 V – 5 meter length	
VA-7480-CAB73	Floating 230 V – 7 meter length	
VA-7480-CAB13	Floating 230 V – 10 meter length	
VA-7482-CAB21	Proportional 24 V – 2 meter length	
VA-7482-CAB31	Proportional 24 V – 3 meter length	
VA-7482-CAB51	Proportional 24 V – 5 meter length	
VA-7482-CAB71-HF	Proportional 24 V – 7 meter length - Halogen free	
VA-7482-CAB21-HF	Proportional 24 V – 2 meter length - Halogen free	
VA-7482CAB7452	Cable kit to replace VA-7452 with VA-7482	

Valve Compatibility (1/2)

Actuator Codes	Johnson Controls	Danfoss	Frese	Industrie Technik	Oventrop	Sauter	Schneider Electric	Siemens	TA Hydronics	Fratelli Pettinarioli	Watts Industries	Controlli
VA-7480-0011	VG4000 Series (discontinued) VG5000 Series (discontinued)	--	--	--	--	--	--	--	--	--	--	--
VA-7480-0312												
VA-7481-0011												
VA-7480-0013												
VA-7481-0013												
VA-7482-0011												
VA-7482-0311												
VA-7482-0312												
VA-7480-0001	VG6000 Series V5000 Series VP1000 Series	AB-QM (DN15-DN32)	VFX (DN15-DN20)	COCON QTZ (DN10-DN32) COCON 2TZ (DN15-DN20) Tri-M Plus (DN15)	VUL Series BUL Series VUT Series BUT Series VXL Series BXL Series VCL (DN10-DN32)	VZx8 Series VZx8C (DN15-DN20)	VVP47 Series VXP47 Series VMP47 Series VVI46 Series VXI46 Series VVS46 Series VXS46 Series	91 Series 93 Series	2131 Series 3131 Series 4131 Series	--	--	--
VA-7481-0001												
VA-7480-0003												
VA-7481-0003												
VA-7482-1001	VG6000 Series VP1000 (DN15-DN20)	AB-QM (DN10-DN20)	VFX Series (DN15-DN20)	COCON QTZ (DN10-DN15)	VUT Series BUT Series VXL Series BXL Series VCL (DN10-DN15)	VZx8 Series VZx8C (DN15-DN20)	VVP47 Series VXP47 Series VMP47 Series VVI46 Series VXI46 Series VVS46 Series VXS46 Series	91 Series	2131 Series 3131 Series 4131 Series	--	--	--
VA-7482-1001-RA												
VA-7482-1301-RA												
VA-7482-2001	V5000 Series	--	--	--	COCON QTZ (DN20-DN32) COCON 2TZ (DN15-DN20) Tri-M Plus (DN15)	VUL Series BUL Series VCL (DN20-DN32)	--	--	--	--	--	--
VA-7482-2001-RA												
VA-7482-3001	VP1000 (DN25-DN32)	AB-QM (DN25-DN32)	--	--	--	--	--	--	--	93 Series	--	--
VA-7480-0201-TA	--	--	--	--	--	--	--	--	TBV-C (DN15-DN25) TBV-CM (DN15-DN25) TBV-CMP (DN15-DN25) KTCM512 (DN15-DN25)	--	--	--
VA-7480-0501-TA												
VA-7482-2201-TA	--	--	--	--	--	--	--	TBV-C (DN15-DN20) TBV-CM (DN15-DN25) TBV-CMP (DN15-DN25) KTCM512 (DN15-DN25)	--	--	--	--
VA-7482-2501-TA												

Valve Compatibility (2/2)

Actuator Codes	Johnson Controls	Danfoss	Frese	Industrie Technik	Oventrop	Sauter	Schneider Electric	Siemens	TA Hydronics	Fratelli Pettinaroli	Watts Industries	Controlli
VA-7480-4001	--	--	Optima Compact 53-13xx (DN10-DN32)	--	--	--	--	--	--	--	--	VSX0xPB VSXT0xPB (DN10-DN32)
VA-7480-4003												
VA-7481-4003												
VA-7482-5001	--	--	Optima Compact 53-13xx 2,5 mm (DN10-DN20)	--	--	--	--	--	--	--	--	VSX03PB VSX04PB VSX05PB VSX06PB (DN10-DN20)
VA-7482-6001	--	--	Optima Compact 53-13xx 5,0 mm (DN10-DN20)	--	--	--	--	--	--	--	--	VSXT03PB VSXT04PB VSXT06PB (DN10-DN20)
VA-7482-7001	--	--	Optima Compact 53-13xx 5,5 mm (DN25-DN32)	--	--	--	--	--	--	--	--	VSXT07PB VSX08PB (DN25-DN32)
VA-7482-8201	VG6000 Series	AB-QM (DN10-DN32)	--	VFX Series (DN15-DN20)	COCON QTZ (DN10-DN32)	VUT Series	VVP47 Series	TBV-C (DN15-DN20)	91 Series	2131 Series	---	VSX03PB VSX04PB VSX05PB VSX06PB (DN10-DN20)
VA-7482-8201-RA	V5000 Series				COCON 2TZ (DN15-DN20)	BUT Series	VXP47 Series	TBV-CM (DN15-DN25)		3131 Series		
VA-7482-8002-RA	VP1000 Series				Tri-M Plus (DN15)	VXL Series	VMP47 Series	TBV-CMP (DN15-DN25)		4131 Series		
VA-7482-9201	--	--	Optima Compact 53-13xx 2,5 mm (DN10-DN20)	--	--	--	--	--	--	--	--	VSX03PB VSX04PB VSX05PB VSX06PB (DN10-DN20)
VA-7482-9201-RA			Optima Compact 53-13xx 5,0 mm (DN10-DN20)									
VA-7482-9002-RA			Optima Compact 53-13xx 5,5 mm (DN25-DN32)									
VA-7483-8201	VG6000 Series	AB-QM (DN10-DN32)	--	VFX Series (DN15-DN20)	COCON QTZ (DN10-DN32)	VUT Series	VVP47 Series	TBV-C (DN15-DN20)	91 Series	2131 Series	---	VSX03PB VSX04PB VSX05PB VSX06PB (DN10-DN20)
VA-7483-8201-RA	V5000 Series				COCON 2TZ (DN15-DN20)	BUT Series	VXP47 Series	TBV-CM (DN15-DN25)		3131 Series		
VA-7483-9201	VP1000 Series				Tri-M Plus (DN15)	VXL Series	VMP47 Series	TBV-CMP (DN15-DN25)		4131 Series		
VA-7483-9201-RA	--	--	Optima Compact 53-13xx 2,5 mm (DN10-DN20)	--	--	--	--	--	--	--	--	VSX03PB VSX04PB VSX05PB VSX06PB (DN10-DN20)
VA-7483-9201-RA			Optima Compact 53-13xx 5,0 mm (DN10-DN20)									
VA-7483-9201-RA			Optima Compact 53-13xx 5,5 mm (DN25-DN32)									

Operation

24 Vac Floating Model

When the signal is applied to the black and red wires, the actuator stem extends. When the signal is removed the actuator remains in position.

If the signal remains applied to the red wire, the actuator will time out and shut off the motor after approximately 90 seconds (13 sec / mm models) and approximately 60 seconds (8 sec / mm models).

When the signal is applied to the black and orange wires, the actuator stem retracts. When the signal is removed the actuator remains in position.

If the signal remains applied to the orange wire, the actuator will time out and shut off the motor after approximately 90 seconds (13 sec/mm models) and approximately 60 seconds (8 sec/mm models).

End of stroke Confirmation

When the signal is applied in the same direction, the actuator turns on every 2 hours and drives in the signal direction for approximately 90 seconds (13 sec / mm models) and approximately 60 seconds (8 sec / mm models) to confirm the end of stroke position.

Input	Direction	
Red wire energised	↓	Actuator stem extends
Orange wire energised	↑	Actuator stem retracts

230 Vac Floating Model

When the signal is applied to the blue and brown wires, the actuator stem extends. When the signal is removed the actuator remains in position. If the signal remains applied to the brown wire, the actuator will time out and shut off the motor after approximately 90 seconds (13 sec/mm models) and approximately 60 seconds (8 sec/mm models).

When the signal is applied to the blue and orange wires, the actuator stem retracts. When the signal is removed the actuator remains in position. If the signal remains applied to the orange wire, the actuator will time out and shut off the motor after approximately 90 seconds (13 sec/mm models) and approximately 60 seconds (8 sec/mm models).

End of stroke Confirmation

When the signal is applied continuously in the same direction, the actuator turns on every 2 hours and drives in the signal direction for approximately 90 seconds (13 sec/mm models) and approximately 60 seconds (8 sec/mm models) to confirm the end of stroke position.

Input	Direction	
Brown wire energised	↓	Actuator stem extends
Orange wire energised	↑	Actuator stem retracts

24 Vac/Vdc Proportional Model Calibration Cycle

VA-7482-xx01 Factory Stroke configured series (Jumper Setting)

When the power is applied, the actuator self-calibrates performing an auto zero detection cycle. The actuator moves the stem down for a complete mechanical valve stroke until no changes are detected. Once the auto-zero is detected the actuator moves the stem accordingly with the input signal, within the value of the electrical stroke as per jumper setting.

When the input signal increases (eg. from 0V to 10V) the actuator stem extends if the actuator is configured as Direct Action (DA) or retracts if the actuator is configured as Reverse Action (RA).

When the input signal decreases (eg. from 10V to 0V) the actuator stem retracts if the actuator is configured as Direct Action (DA) or extends if the actuator is configured as Reverse Action (RA) (see table below).

VA-7482-8x01 and VA-7482-9x01 Auto Stroke detection series

IMPORTANT: Auto Stroke detection Series is suitable with valves having minimum 2 kg spring preloading.

When the power is applied, the actuator self-calibrates performing a complete cycle to detect the real valve stroke. The actuator moves the stem down for a complete mechanical valve stroke until no stroke changes are detected. Once the lower valve stem position is detected, the actuator moves the spindle of actuator up until the spindle is fully retracted in the actuator and the microprocessor counts and stores the full stroke of the actuator, then the actuator drives the spindle down in order to detect the upper valve stem position and being able to calculate the real stroke, subtracting the gap value. As soon as the spindle of the actuator touches the valve stem, the actuator leaves the self-calibration procedure (led red blinking) and enter in the operational mode (led green).

When the input signal increases (eg. from 0V to 10V) the actuator is configured as Direct Action (DA) or retracts if the actuator is configured as Reverse Action (RA).

When the input signal decreases (eg. from 10V to 0V) the actuator stem retracts if the actuator is configured as Direct Action (DA) or extends if the actuator is configured as Reverse Action (RA) (see table below).

End of stroke confirmation

For VA-7482-0011 model only:

When the input signal is at 0 or 100%, the actuator turns on every 2 hours and drives in the signal direction for approximately 90 seconds (13 sec/mm models) and approximately 60 seconds (8 sec/mm models) to confirm the end of stroke position.

For VA-7482-xx01 models:

When the input signal is at 100% the actuator turns on every 2 hours and drives in the signal direction for approximately 60 seconds to confirm the end of stroke position.

For VA-7482-8x01 and VA-7482-9x01 models:

When the input signal remains at 100% for 2 hour, the actuator turn on the motor and drives the spindle in accordance with the signal for approximately 60 sec. to confirm the end of the stroke confirmation.

Action	Input	Direction	
Direct Acting	0...10 Vdc	↓	Actuator stem extends
	10...0 Vdc	↑	Actuator stem retracts
Reverse Acting	0...10 Vdc	↑	Actuator stem retracts
	10...0 Vdc	↓	Actuator stem extends

24 Vac/Vdc Proportional Model with 0...10 Vdc feedback output (VA-7483)

Position feedback

The position feedback signal is for monitoring the actuator stroke position. It feeds information internally to the positioner and a 0-10 VDC signal can supply an external supervisory system.

Auto Stroke detection and end of stroke confirmation capabilities as per the VA-7482 models.

See table below for correspondence between control signal and feedback output.

Input Signal Range	Feedback Output Range
0-10 V	0-10 V
2-10 V	2-10 V
0-20 mA	0-10 V
4.20 mA	2-10 V
Custom Range	0-10 V

Operating Status Indication

24 Vac / 230 Vac Floating Model

The floating models are equipped with a green LED which provides the information about the operating status as follow:

OFF		No power supply
Green Blinking		Moving to position
Green Blinking		End stroke confirmation
Green Steady On		End Stroke reached

24 Vac/Vdc Proportional Model

The proportional models are equipped with a bi-colour LED (green-red) which provides the information about the operating status and diagnostic as follow:

OFF		No power supply
Green Blinking		Moving to position
Green Blinking		End stroke confirmation
Green Steady On		Position reached
Red Blinking		Cycle
Red Steady On		4/20 mA or 2/10 Vdc signal lost


24 Vac/Vdc Proportional Model with Feedback

The proportional models are equipped with a bi-colour LED (green-red) which provides the information about the operating status and diagnostic as follow:

OFF		No power supply
Green Blinking		Moving to position
Green Steady On		Position reached
Red Blinking "Slow"		Initialization / Auto stroke detection
Red Blinking "Fast"		Sticking Error
Red Steady On		4/20 mA or 2/10 Vdc signal lost


Mounting Instruction

When mounting the actuator on terminal unit valves, please follows the instruction below:

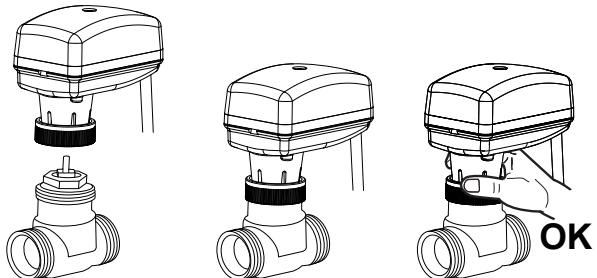


Never use the actuator as a mounting lever.

- It is recommended that the valves be mounted upright or at angles not greater than 90° in an easily accessible location.
- Do not mount the actuator upside down to avoid dripping water, which could enter the housing and damage the mechanism or motor.
- Do not cover with insulating material.
- Sufficient clearance must be allowed for actuator removal (refer to the dimension drawings).

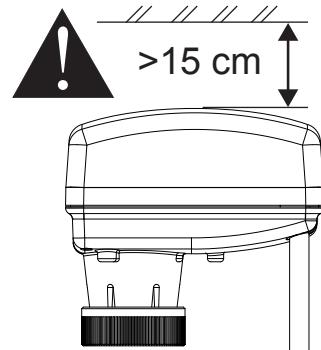

- Mounting position:

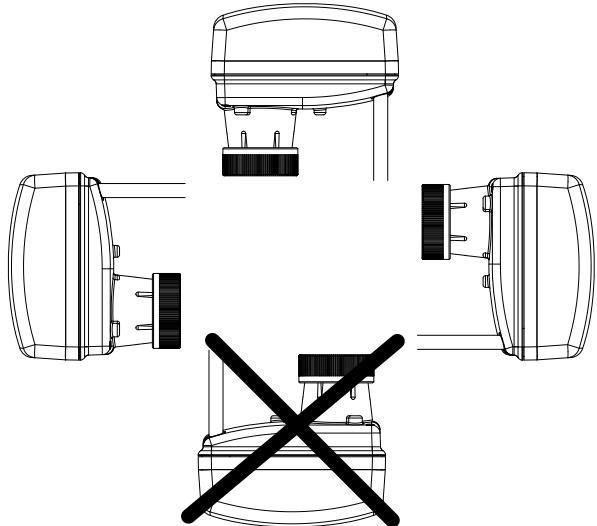

Wiring Instruction




WARNING


When servicing make sure that:

- The electric supply to the actuator is switched off to avoid possible damage to the equipment, personal injury or shock.
- You do not touch or attempt to connect or disconnect wires when electric power is on.
- All wiring should conform to local codes and must be carried out by authorized personnel only.
- Keep high and low voltage wiring separated.
- When using multi-stranded wire apply a cable ferrule to the cable end.
- Make sure that the line power supply is in accordance with the power supply specified on the device.
- Check all wiring connections before applying power to the system.
- Contact with components carrying hazardous voltage can cause electric shock and may result in severe injury or death.
- Short-circuited or improper connected wires may result in permanent damage to the equipment.
- Not adhering to these operational instructions could cause injury or damage the equipment.


Wiring Diagrams

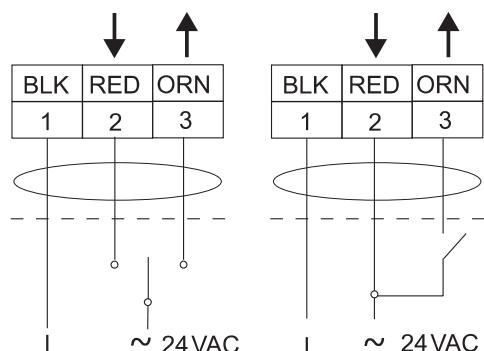


24 Vac Floating Model

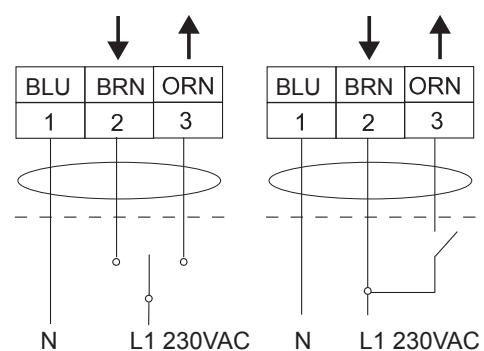

230 Vac Floating Model

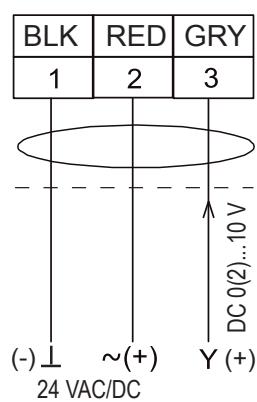

24 Vac/Vdc Proportional Model

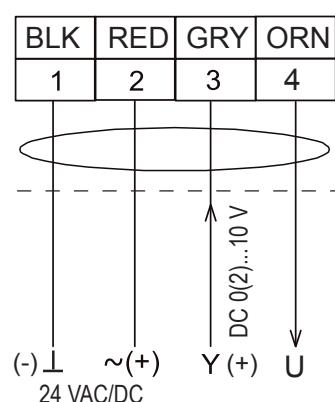


24 Vac/Vdc Proportional Model with Feedback

Dip Switch Settings - Proportional Models only

VA-7482 Models


These proportional models have a 6 dip switches which allow the user to field configure the actuator. The actuator is factory released with all the dip switches in OFF position.

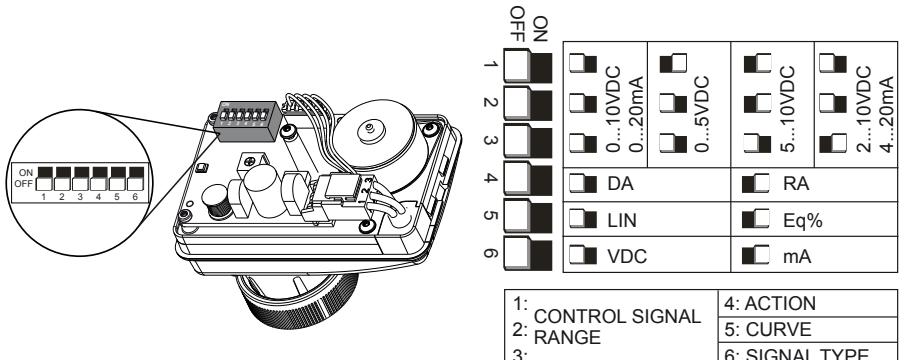

VA-7483 Models

These proportional models have a 8 dip switches which allow the user to field configure the actuator. The actuator is factory released with all the dip switches in OFF position.

The actuator is factory released with all the dip switches in OFF position.

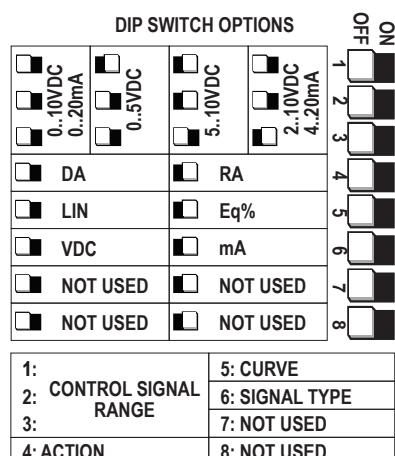


Dip Switch 1 – 2 – 3 – 6


The dip switch 1-2-3 allow the user to change the analog input ranges. To switch from voltage analog input to current analog input the dip switch 6 has to be set accordingly.

Dip Switch 4

The dip switch 4 allows the user to change the action of the actuator in relation of the analog input.

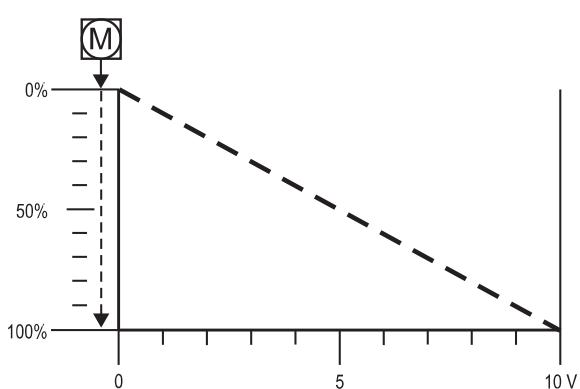

The dip switch 4 OFF (Direct Acting – DA)
When the signal increases the actuator stem extends.

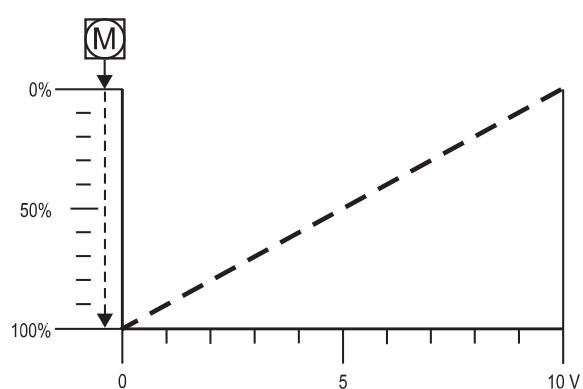

The dip switch 4 ON (Reversing Acting – RA)
When the signal increases the actuator stem retracts.

Dip Switch 5

The dip switch 5 allows the user to change the control characteristic of the actuator in order to obtain the a combination of valve and actuator linear or almost equal percentage.

The dip switch 5 OFF (*Linear*)

We recommend to use along with valve with linear or equal percentage control characteristic.

The dip switch 5 ON (*almost Equal Percentage*)

We recommend to use along with valve with quick opening or on/off control characteristic.


Electrical Actuator Stroke and Closing Dimensions

All the Proportional models with factory stroke configuration option have 1 jumper which allow the user to change the electrical stroke.

From factory the actuators are delivered as follow (see table below).

All the Proportional models with Auto stroke detection do not require the jumper because they are able to detect the real valve stroke by automatically stroke detection.


All the Floating models have fixed stroke and the jumper option is not available.

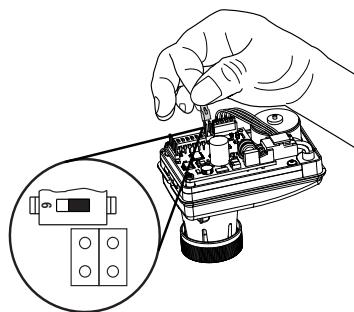

UMES 16,3 mm LMES 10,0 mm	Product Codes	Note
 	PDT_C PDT_O 	VA-7482-0011
	3,2 mm 	VA-7482-1x01
	4,3 mm 	VA-7482-2x01
	6,0 mm 	VA-7482-3x01
	Auto Stroke Detection	
	VA-7482-8x01	
	VA-7482-8002-RA	
	VA-7483-8x01	
	Proportional model VA-7482-x001 / VA-7482-8x01 / VA-7482-9x01 / VA-7483-8x01 / VA-7483-9x01	
	The proportional actuator VA-7482-x001 series is suitable for different terminal unit in the market as shown on the Table, pages 3 and 4.	
 	UMES 14,5 mm LMES 8,2 mm	2,5 mm 5 mm 5,5 mm
	Auto Stroke Detection	
	VA-7482-9x01	
	VA-7482-9002-RA	
	VA-7483-9x01	
UMES 16,3 mm LMES 10,0 mm	---	VA-7480-0xxx VA-7481-0xxx
UMES 14,5 mm LMES 8,2 mm	---	VA-7480-4xxx VA-7481-4003
Floating model VA-7480-0xxx / VA-7481-0xxx / VA-7480-4xxx / VA-7481-4003		
All the Floating models have fixed stroke and the jumper option is not available.		

Note: UMES: Upper Mechanical End Stroke / LMES: Lower Mechanical End Stroke

Dimensions (mm)

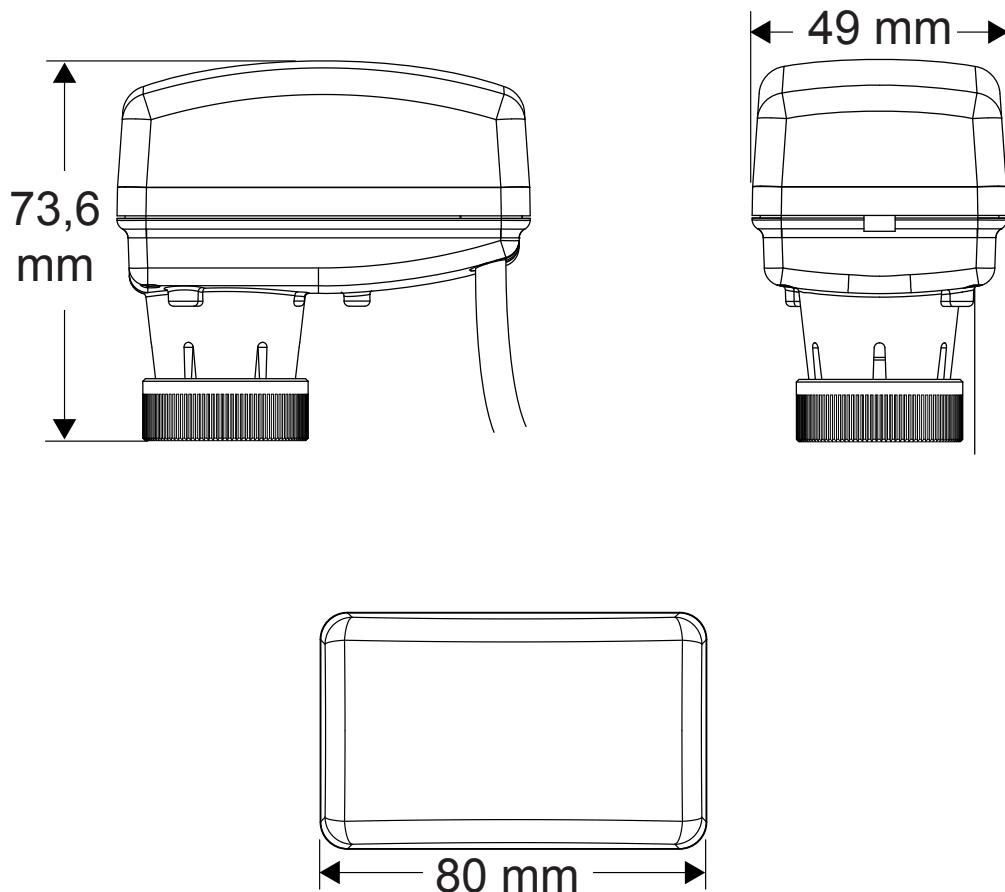

Technical Specifications

Actuator Models	VA-7480-x0x1	VA-7481-00x1	VA-7481-x0x3	VA-7481-x0x3	VA-7482-x002-RA	VA-7482-x0x1	VA-7483-x201			
Action Control	Floating or PAT				Proportional					
Supply Voltage (50/60Hz)	24 VAC ±15%		230 VAC ±10%		24 VAC ±15%		24 VDC ±15%			
Feedback										
Signal	---				0..10 VDC ±5%					
Rating	---				max 2mA at 0..10 VDC					
Input Impedance										
Voltage	---				>100 kΩ					
Current	---				500 Ω					
Power Consumption										
Apparent	2.5 VA		6.0 VA		2.5 VA					
Active	1.5 W		2.2 W		1.5 W					
Maximum Mechanical Stroke	6.3 mm									
Running Time	13 sec/mm	8 sec/mm	13 sec/mm	8 sec/mm						
Protection	IP43						IP54			
Material										
Cover	ABS + PC									
Yoke	PA66 – Glass Mineral filled (30% total)									
Thread Nut	Brass CuZn40Pb2									
Housing Colour	White semitransparent									
Thread Nut Connection	See "Ordering Codes"									
Ambient Operating Condition	0°C to 50°C, 10 to 90 RH%									
Ambient Storage Condition	-20°C to 65°C, 5 to 95 RH%									
Max. Fluid Temperature	95 °C									
Electrical Connections	1.5 m cable length (3 x 0.35 mm ²)	1.5 m cable length (3 x 0.75 mm ²)		1.5m CMP	1.5 m cable length (3 x 0.35 mm ²)	2 m cable length (4 x 0.35 mm ²)				
Operating Status Indications	LED									
Audible Noise Rating	< 30 dB(A)									
Life	250.000 cycles (standard models) / 150.000 cycles (self calibration models)									
Shipping Weight	0.2 Kg									
CE Compliance	Johnson Controls declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive and Low Voltage Directive.									
	* VA-7482-x002-RA is Tested per UL2043. Suitable for Use in Other Environmental Air Space (Plenums) in Accordance with Section 300.22 (C) of the National Electrical Code. UL 60730-1 Listed Type 2 Enclosure, File E194024 XAPX XAPX7									

Building Efficiency

Headquarters: Milwaukee, Wisconsin, USA

Branch Offices: Principal Cities World-wide

Johnson Controls® is a registered trademark of Johnson Controls.

All other marks herein are the marks of their respective owners.

© Copyright 2019 Johnson Controls. All rights reserved. Any unauthorized use or copying is strictly prohibited.

www.johnsoncontrols.com

