



**U.S. TOYO  
FAN CORP.**

## USTF8025 Series AC / Ball Bearing Fans

3651 Walnut Ave., Chino, CA 91710

Web: USToyoFan.com Email: Service@USToyoFan.com Phone: (909) 627-8178

### USTF8025 Series

**Size:** 3.15 in sq. x 1.0 in. thk  
(80mm sq. x 25mm thk.)

**Airflow:** 20 CFM

**Acoustical Noise:** 33 dB (A)

**MATERIAL:** Frame - Aluminum Alloy, Painted Black Finish  
Bearings - Sealed Ball  
Impeller - UL94V-0 Plastic

**WEIGHT:** 7.7 oz. (220g)

**TERMINATION:** Terminals standard (Lead Wires on request)

**OPERATION TEMPERATURE:** -10° to +70° C


**INSULATION RESISTANCE:** 100,000 Ohms min @ 500 VDC

**DIELECTRIC STRENGTH:** 500 VAC for 1 min.


**INSULATION:** Class A

**SAFETY:** Impedance Protected

**SAFETY APPROVALS:** UL, CSA, & CE

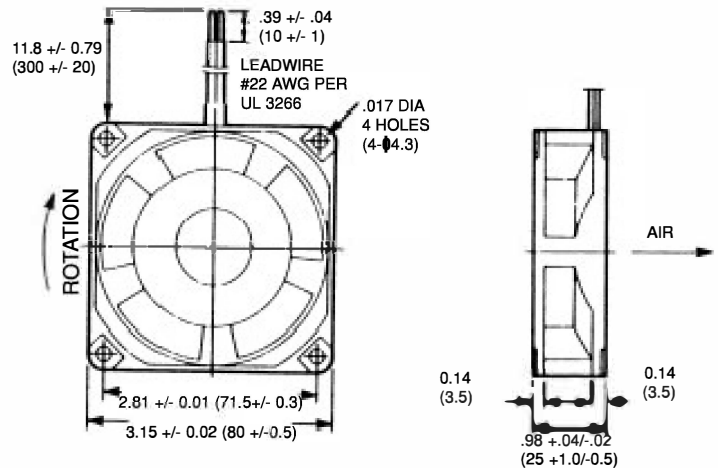

**PERFORMANCE CURVES:** (Obtained with test chamber and methods in accordance with AMCA Std. 210-74)

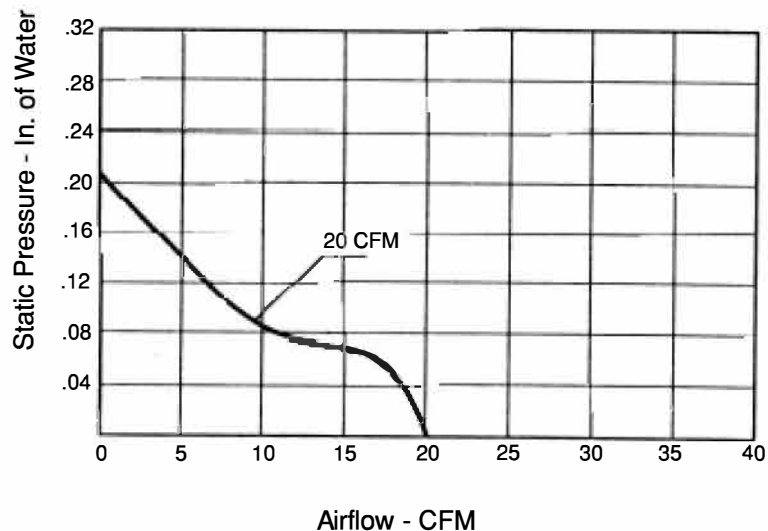

**SPECIFICATIONS:** (Based on 60 Hz Frequency)

| PART NUMBER   | VOLTS | WATTS | mAMPS | RPM  | NOISE dB (A) @ 1M | CFM |
|---------------|-------|-------|-------|------|-------------------|-----|
| USTF80251153W | 115   | 5.0   | 85    | 3100 | 33                | 20  |

NOTE: Standard models with Lead Wires. Terminals not available.