



Excellence, casting quality



- 03/04 Company Introduction
- 05/06 Production equipment and Honor
- 07/49 YWF Series Axial Fans
- 50/56 YWF Series Centrifugal Fans
- 57/62 YWF Series External Rotor Motors
- 63/78 YZF Series Shaded Pole Motors
- 69/69 YZF With Pin Terminal Motors
- 70/70 YCF Series Motors
- 71/71 Electronic Commutator Motors
- 79/80 YGF Series Cross Flow Motors
- 81/85 YJF Series Shaded Pole Motors

Directory




Ø250 Axial Fans





FAVELLE



2D-250 380V/50Hz 0-90Pa (20Pa-850m³/h)
 2E-250 220V/50Hz 0-90Pa (20Pa-830m³/h)
 2E-250 120V/60Hz 0-60Pa (20Pa-950m³/h)
 4D-250 380V/50Hz 0-60Pa (20Pa-540m³/h)
 4E-250 220V/50Hz 0-60Pa (20Pa-550m³/h)
 4E-250 120V/50Hz 0-60Pa (20Pa-600m³/h)



			VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR VOLUME	CAPACITANCE	NOISE	NET WEIGHT	LICENSE	NO. ON THE CURVE
			V	Hz	A	W	r/min	m³/h	μF	dBA	kg		
			380	50	0.22	80	2500	970	/	60	2.5	CE	1
			220	50	0.40	80	2400	960	3	60	2.5	CE	2
			120	60	0.95	120	2850	1070	10	60	2.5	CE	3
			380	50	0.17	60	1400	770	/	55	2.5	CE	4
			220	50	0.23	50	1380	730	2	55	2.5	CE	5
			120	60	0.55	65	1600	800	8	55	2.5	CE	6




11/12

Ø300 Axial Fans




FAVELLE



2D-300 380V/50Hz 0-90Pa (20Pa-1970m³/h)
 2E-300 220V/50Hz 0-90Pa (20Pa-1900m³/h)
 2E-300 120V/60Hz 0-60Pa (20Pa-2000m³/h)
 4D-300 380V/50Hz 0-60Pa (20Pa-1330m³/h)
 4E-300 220V/50Hz 0-60Pa (20Pa-1500m³/h)
 4E-300 120V/60Hz 0-60Pa (20Pa-1550m³/h)




			VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR VOLUME	CAPACITANCE	NOISE	NET WEIGHT	LICENSE	NO. ON THE CURVE
			V	Hz	A	W	r/min	m³/h	μF	dBA	kg		
			380	50	0.25	145	2380	2118	/	60	3.0	CE	1
			220	50	0.66	145	2300	2030	4	60	3.0	CE	2
			120	60	1.76	210	2500	2100	16	60	3.0	CE	3
			380	50	0.22	75	1360	1563	7	58	3.0	CE	4
			220	50	0.42	85	1350	1664	3	58	3.0	CE	5
			120	60	0.85	95	1550	1700	10	58	3.0	CE	6



13/14


Ø 315 Axial Fans

F AVELLE




4D-315 380V/50Hz 0-90Pa (20Pa-1350m³/h)
4E-315 220V/50Hz 0-90Pa (20Pa-1350m³/h)
6D-315 380V/50Hz 0-50Pa (20Pa-720m³/h)
6E-315 380V/50Hz 0-50Pa (20Pa-740m³/h)

	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR VOLUME	CAPACITANCE	NOISE	NET WEIGHT	LICENSE	NO ON THE CURVE
	V	Hz	A	W	rpm	m³/h	μF	dBA	kg		
YWF-4D-315-S-9205-G	380	50	0.23	80	1300	1479	/	60	3.5	CE	1
YWF-4E-315-S-9205-G	220	50	0.45	85	1350	1537	4	60	3.5	CE	2
YWF-6D-315-S-9205-G	380	50	0.16	55	920	1049	/	58	3.5	CE	3
YWF-6E-315-S-9205-G	220	50	0.28	60	920	1040	2	58	3.5	CE	4

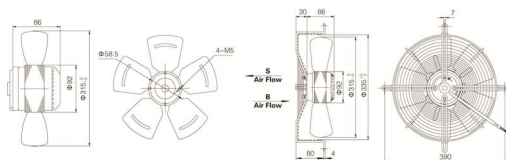


Ø 330 Axial Fans

F AVELLE



4D-330 380V/50Hz 0-90Pa (20Pa-1480m³/h)
4E-330 220V/50Hz 0-90Pa (20Pa-1480m³/h)
6D-330 380V/50Hz 0-50Pa (20Pa-930m³/h)
6E-330 380V/50Hz 0-50Pa (20Pa-930m³/h)


	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR VOLUME	CAPACITANCE	NOISE	NET WEIGHT	LICENSE	NO ON THE CURVE
	V	Hz	A	W	rpm	m³/h	μF	dBA	kg		
YWF-4D-330-S-9205-G	380	50	0.30	85	1300	1736	/	62	4.0	CE	1
YWF-4E-330-S-9205-G	220	50	0.50	95	1300	1635	4	62	4.0	CE	2
YWF-6D-330-S-9205-G	380	50	0.15	55	920	1229	/	60	4.0	CE	3
YWF-6E-330-S-9205-G	220	50	0.28	60	920	1260	2	60	4.0	CE	4

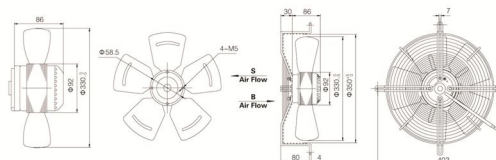

15/16


Ø 350 Axial Fans

F AVELLE



4D-350 380V/50Hz 0-90Pa (20Pa-2000m³/h)
4E-350 220V/50Hz 0-90Pa (20Pa-1960m³/h)
4E-350 120V/60Hz 0-90Pa (20Pa-2440m³/h)
6D-350 380V/50Hz 0-60Pa (20Pa-1170m³/h)
6E-350 220V/50Hz 0-60Pa (20Pa-1240m³/h)
6E-350 120V/60Hz 0-60Pa (20Pa-1160m³/h)

	VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR VOLUME	CAPACITANCE	NOISE	NET WEIGHT	LICENSE	NO ON THE CURVE
	V	Hz	A	W	rpm	m³/h	μF	dBA	kg		
YWF-4D-350-S-10234-G	380	50	0.38	140	1380	2290	/	62	5.0	CE	1
YWF-4E-350-S-10234-G	220	50	0.65	140	1380	2270	4	62	5.0	CE	2
YWF-4E-350-S-10234-T	120	60	1.65	180	1600	2580	16	62	5.0	CE	3
YWF-6D-350-S-10234-G	380	50	0.30	80	920	1520	/	56	5.0	CE	4
YWF-6D-350-S-10234-T	220	50	0.40	80	920	1590	3	56	5.0	CE	5
YWF-6E-350-S-10234-G	120	60	0.68	80	1080	1840	8	56	5.0	CE	6

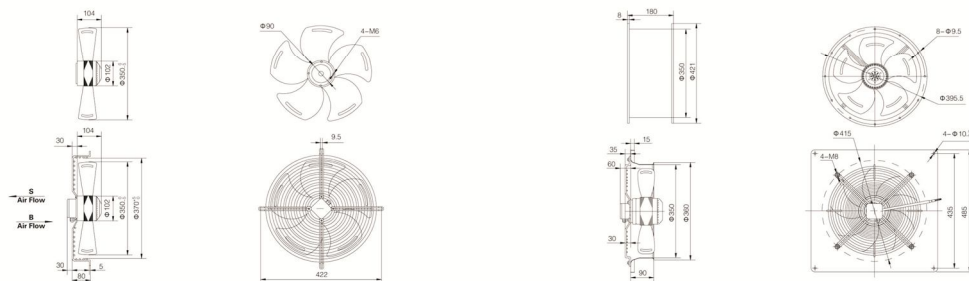


17/18

Ø 380 Axial Fans





FAVELLE



4D-380 380V/50Hz 0-90Pa (20Pa-2680m³/h)
4E-380 220V/50Hz 0-90Pa (20Pa-2670m³/h)
6D-380 380V/50Hz 0-60Pa (20Pa-1870m³/h)
6E-380 220V/50Hz 0-60Pa (20Pa-1850m³/h)



	VOLTAGE V	FREQUENCY Hz	CURRENT A	INPUT W	SPEED r/min	AIR VOLUME m³/h	CAPACITANCE μF	NOISE dBA	NET WEIGHT kg	LICENSE	NO. ON THE CURVE
YWF-4D-380-S-102/47-G	380	50	0.45	160	1400	2969	/	68	5.5	CE	1
YWF-4E-380-S-102/47-G	220	50	0.75	160	1400	2913	6	68	5.5	CE	2
YWF-6D-380-S-102/47-G	380	50	0.35	95	920	2270	/	58	5.5	CE	3
YWF-6E-380-S-102/47-G	220	50	0.45	90	920	2249	4	58	5.5	CE	4




19/20

Ø 400 Axial Fans





FAVELLE



4D-400 380V/50Hz 0-90Pa (20Pa-3150m³/h)
4E-400 220V/50Hz 0-90Pa (20Pa-3200m³/h)
4E-400 120V/50Hz 0-90Pa (20Pa-3800m³/h)
6D-400 380V/50Hz 0-60Pa (20Pa-1980m³/h)
6E-400 220V/50Hz 0-60Pa (20Pa-1950m³/h)
6E-400 120V/50Hz 0-60Pa (20Pa-2150m³/h)




			VOLTAGE V	FREQUENCY Hz	CURRENT A	INPUT W	SPEED r/min	AIR VOLUME m³/h	CAPACITANCE μF	NOISE dBA	NET WEIGHT kg	LICENSE	NO. ON THE CURVE
YWF-4D-400-S-102/47-G	YWF-4D-400-S-102/47-T	YWF-4D-400-S-102/47-B	380	50	0.47	180	1380	3400	/	68	6.0	CE	1
YWF-4E-400-S-102/47-G	YWF-4E-400-S-102/47-T	YWF-4E-400-S-102/47-B	220	50	0.82	180	1380	3541	6	68	6.0	CE	2
YWF-6D-400-S-102/47-G	YWF-6D-400-S-102/47-T	YWF-6D-400-S-102/47-B	120	60	2.35	250	1600	4000	22	58	6.0	CE	3
YWF-6D-400-S-102/47-G	YWF-6D-400-S-102/47-T	YWF-6D-400-S-102/47-B	380	50	0.38	108	920	2490	/	58	6.0	CE	4
YWF-6E-400-S-102/47-G	YWF-6E-400-S-102/47-T	YWF-6E-400-S-102/47-B	220	50	0.50	108	920	2460	4	58	6.0	CE	5
YWF-6E-400-S-102/47-G	YWF-6E-400-S-102/47-T	YWF-6E-400-S-102/47-B	120	60	1.20	135	960	2710	12	58	6.0	CE	6







21/22

Axial Fans




4D-400	380V/50Hz	0~90Pa	(20Pa-3500m³/h)
4E-420	220V/50Hz	0~90Pa	(20Pa-3400m³/h)
6D-420	380V/50Hz	0~60Pa	(20Pa-2550m³/h)
6E-420	220V/50Hz	0~60Pa	(20Pa-2250m³/h)

	VOLTAGE V	FREQUENCY Hz	CURRENT A	INPUT W	SPEED r/min	AIR VOLUME m³/h	CAPACITANCE μ F	NOISE dBA	NET WEIGHT kg	LICENSE	KOLON CURVE
											
YWF-4D-420-S-10247-G	380	50	0.50	195	1350	3845	/	68	6.5	 	
YWF-4E-420-S-10247-G	380	50	0.90	195	1350	3731	6	68	6.5	 	
YWF-4D-420-S-10247-G	220	50	0.40	120	900	2972	/	58	6.5	 	
YWF-6S-420-S-10247-G	380	50	0.90	195	900	2992	/	58	6.5	 	







23/24

Axial Fans




4D-450	380V/50Hz	0-90Pa	(20Pa-4450m ³ /h)
4E-450	220V/50Hz	0-90Pa	(20Pa-4210m ³ /h)
4E-450	120V/60Hz	0-90Pa	(20Pa-4850m ³ /h)
6D-450	380V/50Hz	0-90Pa	(20Pa-3000m ³ /h)
6E-450	220V/50Hz	0-90Pa	(20Pa-2750m ³ /h)
6E-450	120V/60Hz	0-90Pa	(20Pa-3400m ³ /h)


			VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR VOLUME	CAPACITANCE	NOISE	NET WEIGHT	LICENSE	NO ON THE CLIMATE
V				Hz	A	W	rpm	m³/h	μF	dB(A)	kg		
YWF-4D-450-S-10260-G	YWF-4D-450-S-10260-T	YWF-4D-450-S-10260-B	380	50	0.60	250	1360	4800	/	68	8.0		
YWF-4E-450-S-10260-G	YWF-4E-450-S-10260-T	YWF-4E-450-S-10260-B	220	50	1.20	250	1350	4620	/	68	8.0		
			120	60	2.5	300	1600	5200	1/32	68	8.0		
YWF-6D-450-S-10260-G	YWF-6D-450-S-10260-T	YWF-6D-450-S-10260-B	380	50	0.42	150	900	3120	/	60	8.0		
YWF-6E-450-S-10260-G	YWF-6E-450-S-10260-T	YWF-6E-450-S-10260-B	220	50	0.75	150	900	3220	/	60	8.0		
			120	60	1.52	190	1050	3600	2	60	8.0		




25/26




			VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	1/2" VOLUME	CAPACITANCE	NOISE	NET WEIGHT	LICENSE	NO. ON THE CURVE
V	Hz	A	W	min	in	dbA	kg						
YWF-4D-500-S-13735-G	YWF-4D-500-S-13735-T	YWF-4D-500-S-13735-B	380	50	0.9	450	1300	6570	/	72	9.0	 	
YWF-4E-500-S-13735-G	YWF-4E-500-S-13735-T	YWF-4E-500-S-13735-B	220	50	1.96	420	1300	6420	10	72	9.0	 	
YWF-6D-500-S-13735-G	YWF-6D-500-S-13735-T	YWF-6D-500-S-13735-B	380	50	0.55	230	900	4840	/	68	9.0	 	
YWF-6E-500-S-13735-G	YWF-6E-500-S-13735-T	YWF-6E-500-S-13735-B	220	50	1.15	230	900	4830	10	68	9.0	 	

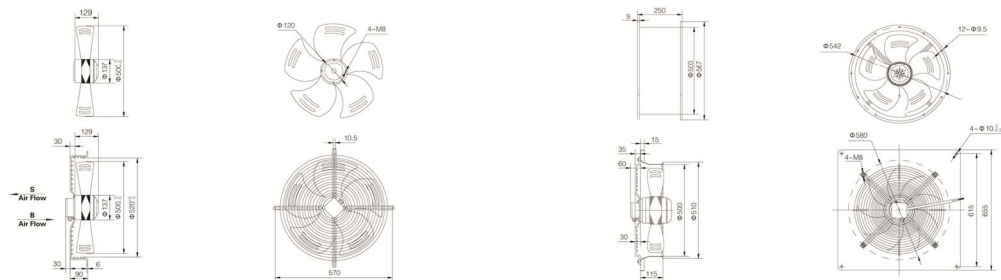

27/28



			VOLTAGE	FREQUENCY	CURRENT	INPUT	SPEED	AIR VOLUME	CAPACITANCE	NOISE	NET WEIGHT	LICENSE	NO ON THE CURVE
V	Hz	A	W	rpm	m³/h	μF	dBA	kg					
YWF-4D-550-S-13750-Q	YWF-4D-550-S-13750-T	YWF-4D-550-S-13750-B	360	50	1.2	600	1300	8720	/	75	11		
YWF-4E-550-S-13750-Q	YWF-4E-550-S-13750-T	YWF-4E-550-S-13750-B	220	50	2.55	550	1300	8010	12	75	11		
YWF-4D-550-S-10750-Q	YWF-4D-550-S-10750-T	YWF-4D-550-S-10750-B	360	50	0.9	330	900	6430	/	70	11		
YWF-4E-550-S-10750-Q	YWF-4E-550-S-10750-T	YWF-4E-550-S-10750-B	220	50	1.6	330	900	6320	10	70	11		

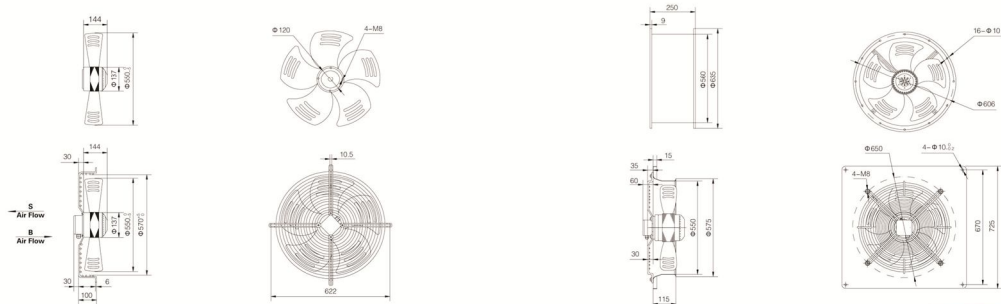


29/30

Ø 600 Axial Fans





FAVELLE



4D-600 380V/50Hz 0-120Pa (20Pa-10500m³/h)
 4E-600 220V/50Hz 0-120Pa (20Pa-9800m³/h)
 6D-600 380V/50Hz 0-120Pa (20Pa-7900m³/h)
 6E-600 220V/50Hz 0-120Pa (20Pa-7470m³/h)



	VOLTAGE V	FREQUENCY Hz	CURRENT A	INPUT W	SPEED r/min	AIR VOLUME m³/h	CAPACITANCE μF	NOISE dBA	NET WEIGHT kg	LICENSE	NO. ON THE CURVE
YWF-4D-600-S-137/70-G	380	50	1.6	780	1350	10820	/	78	14	CE	1
YWF-4E-600-S-137/70-G	220	50	3.2	700	1360	10040	16	78	14	CE	2
YWF-6D-600-S-137/70-G	380	50	1.4	500	900	8060	/	72	14	CE	3
YWF-6E-600-S-137/70-G	220	50	2.45	480	900	8180	12	72	14	CE	4




31/32

Ø 630 Axial Fans




FAVELLE



4D-630 380V/50Hz 0-120Pa (20Pa-11750m³/h)
 4E-630 220V/50Hz 0-120Pa (20Pa-10390m³/h)
 6D-630 380V/50Hz 0-120Pa (20Pa-8250m³/h)
 6E-630 220V/50Hz 0-120Pa (20Pa-8550m³/h)



	VOLTAGE V	FREQUENCY Hz	CURRENT A	INPUT W	SPEED r/min	AIR VOLUME m³/h	CAPACITANCE μF	NOISE dBA	NET WEIGHT kg	LICENSE	NO. ON THE CURVE
YWF-4D-630-S-137/70-G	380	50	1.6	800	1320	12200	/	78	15	CE	1
YWF-4E-630-S-137/70-G	220	50	3.5	750	1360	10960	16	78	15	CE	2
YWF-6D-630-S-137/70-G	380	50	1.45	550	900	8830	/	75	15	CE	3
YWF-6E-630-S-137/70-G	220	50	2.55	520	900	9168	12	75	15	CE	4



33/34